



**OWNER'S MANUAL FOR THE F-12 (FRS) w/CTCSS**



Check out our accessories at [www.midlandradio.com](http://www.midlandradio.com) or click on the images



[www.midlandradio.com](http://www.midlandradio.com)

## TABLE OF CONTENTS

<b>OPTIONAL ACCESSORIES FOR YOUR RADIO</b> .....	3
<b>TIPS FOR GETTING THE MOST FROM YOUR F-12</b> .....	4
<b>A NOTE ABOUT THE CTCSS CODES</b> .....	4
<b>PREPARATION</b> .....	4
BATTERIES .....	4
To Install Batteries: .....	4
Low Battery Indicator: .....	4
Instructions for optional charger .....	4
<b>QUICK USE INSTRUCTIONS:</b> .....	5
<b>Operating the Radio</b> .....	5
DISPLAY SYMBOLS .....	5
TO TURN THE RADIO ON OR OFF .....	6
TO CHANGE THE CHANNEL IN USE .....	6
ACTIVATING SCAN FUNCTIONS .....	6
Busy Channel Scan: .....	6
Activating Dual Watch .....	6
TO USE CALL BUTTON .....	7
TO ENABLE/DISABLE "ROGER-BEEP" .....	7
TO ENABLE / DISABLE KEY BOARD LOCK .....	7
POWER SAVE CIRCUIT .....	7
USING THE MONITOR FUNCTION .....	7
TO OPERATE HANDS FREE VOX .....	8
Setting VOX Functions .....	8
TO ENABLE / DISABLE VOX MODE .....	8
ACTIVATING "PRIVACY" CODES .....	9
To activate "CTCSS" codes .....	9
RESETTING THE RADIO .....	9
<b>TROUBLESHOOTING</b> .....	10
<b>CARE OF RECHARGEABLE NI-CAD AND NI-MH BATTERIES</b> .....	11
<b>CHANNEL FREQUENCIES SERVICE:</b> .....	12
<b>SERVICE</b> .....	13
<b>LIMITED WARRANTY</b> .....	13

## OPTIONAL ACCESSORIES FOR YOUR RADIO

Accessory Name	Model Number
Ni-MH battery pack	18-B10
Desk Charger stand	18-F10
Lapel Microphone with Ear-bud Speaker	22-405
Speaker/Microphone	22-411
Stealth Type Noise Canceling Throat Mic with Ear-bud	22-430
Boom Microphone Headset	22-540

Call 1 816 241 8500 ext. 200 to order accessories or order them online at [www.midlandradio.com](http://www.midlandradio.com)

**This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.**

Your Midland model F-10 brings the new FRS (Family Radio Service) to your fingertips. The Family Radio Service is provided for by the FCC and is totally license free. For the first time business and the general public can use the quiet UHF FM band for personal communications at no charge. The F-10 uses maximum allowable power for range up to 2 miles. Use for fishing, hunting, picnics, biking, business, or any other activity where communications are needed for convenience or safety. The model F-10 operates on 14 channels to provide the best in quiet and private communication. Also this radio offers power save, and auto-squelch.

## WARNING!!!

Your wireless hand-held portable transceiver contains a low power transmitter. When the Push-to-Talk (PTT) button is pressed it sends out radio frequency (RF) signals. The device is authorized to operate at a duty factor not to exceed 50%. In August 1996, the Federal Communications Commission (FCC) adopted RF exposure guidelines with safety levels for hand-held wireless devices.

To maintain compliance with the FCC's RF exposure guidelines, this transmitter and its antenna must maintain a separation distance of least 2 inches (5 centimeters) from your face. Speak in a normal voice, with the antenna pointed up and away from the face at the required separation distance. The belt clip is for storage purposes only. DO NOT TRANSMIT WHILE USING THE BELT CLIP. To transmit, hold the device away from your body and ensure the antenna is at least 2 inches (5 centimeters) from your body when transmitting.

## TIPS FOR GETTING THE MOST FROM YOUR F-12

Due to the band of operation (462/467 MHz) the F-10 provides communications that are virtually free of atmospheric interference (skip) that is common on lower frequency bands. Along with this and an antenna system that is very efficient as compared to other unlicensed radio bands, communications range is surprisingly good. Many times the limits to maximum possible range are environmental factors such as blockage caused by trees, buildings, hills, or other obstructions. If you find communication is not possible, many times this can be overcome by moving only a few feet to a new location. Range may be reduced while operating in a vehicle or from inside to outside a metal building. Battery condition also affects range. The F-10 operates best on alkaline batteries. This unit is a precision piece of electronic equipment that should not be exposed to water or handled carelessly. Normal care should result in years of trouble free operation. Do not leave batteries installed over a long period of time as leakage may occur that can destroy the radio. Always save your receipt, as it is required for warranty consideration.

## A NOTE ABOUT THE CTCSS CODES

This radio incorporates 38 CTCSS (Continuous Tone Coded Squelch System) codes that, when activated, prevent the user from hearing other radios that do not have the same code. These codes do not make your conversation private. If you experience difficulties contacting or hearing other radios in your group make sure the CTCSS code is set the same on all radios. If you are using the F-12 where interference from other radios or electrical devices are present, enabling the CTCSS codes will usually mute the interference. Many times interference will be noticed by the presence of loud static from the speaker.

## PREPARATION

### BATTERIES:

F-10 radios operate with 3 AAA Alkaline, Ni-Cad (nickel cadmium) or Ni-MH (nickel metal hydride) batteries (optional) or a Ni-MH battery pack. Ni-Cad batteries provide about 7 hours of use. Alkaline batteries will provide about 20 hours of use and Ni-MH batteries will provide about 14 hours of use. Ni-Cad and Ni-MH batteries **must** be charged prior to use. Charge Ni-Cad or Ni-MH batteries at least 10 hours. **DO NOT attempt to charge any type of Alkaline batteries in this radio.**

### Installing Batteries:

Hold the radio face down. Press the latch so it swings away from the cover.

1. Lift the battery cover slightly. Gently slide the cover off the unit.
2. Insert 3 AAA batteries observing the proper polarity. If a battery pack is used, observe the up arrow is visible and pointing toward the top of the radio.
3. Replace the battery cover over the batteries and fasten with the latch.

### Low Battery Indicator:

The battery icon in the lower left of the display will flash when the batteries are in need of charging.

### Instructions for optional charger


Install NI-MH (nickel metal-hydride) observing their polarity. Plug the power adapter for the 18-F10 charger into any 110/115 V wall socket. Insert the radio into the charging stand with the front facing you and observe that the LED on the charger is lit. Charge the batteries for at least 10 hours for Ni-MH. The radio should be turned off while charging. For charging with optional wall charger observe instructions supplied with the charger.

**DO NOT attempt to charge any type of Alkaline batteries in this radio.**

**QUICK USE INSTRUCTIONS:**

1. Install fresh alkaline or fully charged Ni-Cad or Ni-MH batteries.
2. Turn the unit on by turning the ON/OFF/VOLUME control on the top of the radio clockwise until a click is heard.
3. Turn the ON/OFF/VOLUME control clockwise to adjust the volume. To test the volume setting, press and hold the **"MON"** button so static noise can be heard. The noise can be used as a reference level for volume setting.
4. Select the desired channel by pressing and releasing the **Λ** or **V** button.
5. To talk press the **PTT** (push to talk) button on the left side of the radio and talk in a normal voice into the front of the radio about three inches away from your mouth.
6. To listen release the **PTT** button.

**Operating the Radio**

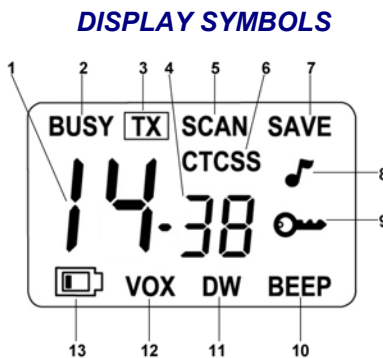

**CAUTION: DON'T EXPOSE THE DISPLAY TO EXTREME HOT OR COLD TEMPERATURE**

1. **Channel number:** Displays channel number 1-14.
2. **BUSY Symbol:** Indicates activity on the channel.
3. **TX Symbol:** Indicates the unit is transmitting.
4. **CTCSS Code:** Displays the number of the code selected for the channel in use.
5. **SCAN Symbol** Indicates the scan mode is in use
6. **CTCSS Symbol:** Indicates a "Privacy" code is in use.
7. **SAVE Symbol:** Flashes indicating battery save is active.
8. **Musical note** indicates **ROGER BEEP** is on.
9. **Key Symbol** indicates when the keypad has been locked. Only the **"PTT"** and **"CALL"** buttons are active when this indicator is on.
10. **BEEP** indicates the button press tone and power up tones are active.
11. **DW Symbol:** Indicates Dual Watch channel selection is active.
12. **VOX Symbol:** Indicates "VOX" is activated
13. **Battery symbol** shows the battery condition. Replace or recharge the batteries when this indicator displays 2 or fewer segments of the battery.

## FEATURES AND LOCATION OF CONTROLS

### TURNING THE RADIO ON OR OFF:

The ON/OFF VOLUME control at the top of the radio and controls power and volume. When the radio is switched on, series of tones will be heard confirming that radio is working. (If enabled)

### CHANGING THE CHANNEL:

Press and release the channel  $\wedge$  or  $\vee$  button to select the desired channel. To change channel rapidly, press and hold the channel button  $\wedge$  or  $\vee$  until the desired channel appears on the display and release the button.

**Warning:** When using the 22-405 or the 22-540 you must switch the VOX/PTT switch to PTT to allow you to change channels or exit the vox mode.


### ACTIVATING SCAN FUNCTIONS

The F-10 has three scan modes. The most popular and most used is the "**BUSY**" channel scan. This allows the radio to stop on a channel that someone is talking on. When the radio stops on a "Busy" channel, the scan will stop and resume after about 5 seconds. The second is the "**OPEN**" Channel Scan. This allows the radio to stop on channels that are NOT in use. This is useful when looking for open channels to use. The third is "**DUAL WATCH**". This allows you to scan only two channels. This is useful when you want to keep track of two other people.



#### Busy Channel Scan:

1. Press and release the "**F**" button one time, the "SCAN" icon (2) will begin flashing in the upper part of the display.
2. Press and release the  $\wedge$  or  $\vee$  channel button to activate scan. The unit will now begin scanning through the channels.  
Pressing the  $\wedge$  or  $\vee$  channel button during scan will determine if the channels are scanned up or down.  
Pressing the "**PTT**" (push to talk) button will cause the radio to stop scanning and return to normal operate mode.
3. To reactivate scan repeat steps above.

#### Open Channel Scan:

1. Press and release the "**F**" button repeatedly (usually twice) until the "**B.SCAN**" icon (2) flashes in the upper part of the display.
2. Press and release the  $\wedge$  or  $\vee$  channel button to activate scan. The radio will begin to scan for **OPEN** channels.(channels not in use)  
 Scanning will stop on the first available open channel for about 5 seconds then move to the next open channel.
3. Press the "**PTT**" button to stop scanning and talk on that channel.
4. To reactivate scan repeat steps above.

#### Dual Watch - Dual watch is a function that allows you to scan only two channels.

1. Select channel one. This will be the channel that is on the display when you start the scan.
2. Press the "**F**" button repeatedly (usually 3 times) until "**DW**" (3) is flashing in the upper part of the display.
3. Select the second channel to be scanned. This must be done without any delay between button presses.  
 About 1 second after your selection of the second channel is complete the radio will begin switching between the two channels.  
 When the radio hears activity on either channel, scanning will stop on that channel for about 5 seconds and then resume scanning.  
If communication is desired on the channel scanning stopped on, press the "**PTT**" button.  
This will deactivate Dual Watch and allow you to communicate normally.
4. To reactivate Dual Watch, repeat steps above.




### USING CALL BUTTON:

Press and release the **CALL** button. A call signal will be sent for about 2 seconds. Both radios must be on the same channel and the radios must be turned on.

 **Warning:** The call feature should be avoided when using the 22-405 or 22-540.

### ENABLE/DISABLE "ROGER-BEEP":

The radio transmits a rapid tone sequence when the PTT button is released if this feature is active. The default condition is for the "roger beep" to be off.

1. Press the "F" button (usually 4 times) until you see on the display "**oF**" or "**oN**" (depending on previous programming) with a flashing music note ♪ (7) in the upper right of the display.
2. Press the channel  $\wedge$  or  $\vee$  buttons to select **oF** or **oN**.
  -  "**oF**" is roger beep off. "**oN**" is roger beep on.
3. Press **ENTER** to store your selection.
  -  If no buttons are pressed for 10 seconds the display will revert back to normal operation mode.
  -  The Roger beep should be deactivated when using the radio in VOX mode.

### ENABLE/DISABLE KEY BOARD LOCK:

To Enable KEY BOARD LOCK press and hold the "**ENTER**" button for 2 seconds. The display will contain a key symbol (10) in the lower right of the display. **PTT**, **MON** and **CALL** buttons will still be active. The "ENTER" button will also activate the backlight for 5 seconds. When radio is in lock mode and any other keys are pressed a tone will be heard.

To Disable KEY BOARD LOCK Press and hold the "ENTER" button for 2 seconds.

### USING THE MONITOR FUNCTION:

1. Press and hold the "**MON**" button on the side of the radio to open the squelch. This allows you to override the squelch. Release the "**MON**" button to restore the squelch to normal.



## OPERATING HANDS FREE VOX - VOICE OPERATED TRANSMIT

To get the most use from the "VOX" feature you must first determine what sensitivity level is needed to activate the "VOX" control. Sensitivity is how loud you have to talk to activate the "VOX" circuit. The "VOX" has three levels of sensitivity that can be adjusted. The option 1 you can talk in a normal voice with no background noise to activate the "VOX" circuit. The option 2 will require more voice level to activate the "VOX" circuit. This is useful in slightly noisier areas that might activate the "VOX" without talking. The option 3 will require the most voice level to activate the "VOX" circuit. This will be useful in very noisy areas. The next adjustment is the *delay*. This is a function of the "VOX" that keeps the radio in transmit mode after you stop talking. A delay that is set to short will cause the "VOX" circuit to stop between some words. The delay is adjustable to three levels. Level 1 will give about one half second of delay, level three will give you about one and one half seconds of delay. By activating the "VOX" you only have to talk into the front of the radio or use a headset to make the radio transmit. The PTT (push to talk) button is not functional in "VOX" mode. It is recommended to use a headset when using the "VOX" feature.

**NOTE:** It is recommended to disable the Roger Beep when VOX is in use. See page 8 for instructions.

### SETTING VOX FUNCTIONS:

#### Setting VOX Levels

1. With the radio in the off position, press and hold the **"CALL"** button and turn the radio on. When the radio powers up release the button. The display will show "L" followed by a 1, 2 or 3 depending on previous settings.
2. Press the channel  $\wedge$  or  $\vee$  buttons to select the desired level.  
 As described earlier L 1 will be the most sensitive and L 3 will be the least sensitive.
3. Press the **"F"** button to switch to the Delay setting. A "d" followed by a 1, 2 or a 3 will show on the display depending on previous settings.
4. Press the channel  $\wedge$  or  $\vee$  buttons to select the desired delay.  
 As described earlier d 1 will be the shortest and d 3 will be the longest delay.
5. Press the **"ENTER"** button to store your settings and return to normal operation mode.

### TO ENABLE / DISABLE VOX MODE

Press and hold the **"F/VOX"** button on the front of the radio for 2 seconds.

**Warning:** When using the 22-405 or the 22-540 you must switch the VOX/PTT switch to PTT to allow you to change channels or exit the VOX mode.

### POWER SAVE CIRCUIT

This is a completely automatic function of the radio and is not adjustable. When the radio has not transmitted or received a signal for about 8 seconds it will begin to cycle from a sleep mode to fully on. This occurs several times a second. If a signal is received or you cause the unit to transmit the radio will become fully awake. This cycling from sleep to fully on increases the battery life more than 50%.

### RESETTING THE RADIO

If the radio stops responding to button presses or otherwise does not function properly in some cases the radio can be reset to restore normal operation.

To reset the radio: With the radio off, press and hold the **"F"** button and turn the radio on. Release the **"F"** button when the radio powers up. (See turning the radio on)



## ACTIVATING "PRIVACY" CODES

### To activate "CTCSS" codes

Activating the "CTCSS" code will prevent you from hearing any conversation that is not using the same "CTCSS" code. This does not make your conversation private.

1. Press the "**F**" button twice to cause the icon "**CTCSS**" to be displayed in the upper left of the display to flash.
2. Press and release the "**UP**" or "**DOWN**" buttons to select the "CTCSS" code you desire.
3. Press "**ENTER**" to store the code setting for that channel.

A code of "**oF**" means no code is programmed.

You must do this for each of the channels you want CTCSS codes on.

Activating the "CTCSS" code will prevent you from hearing any conversation that is not using the same "CTCSS" code. This does not make your conversation private.

4. If you wish to set another channel for CTCSS code, choose a different code than the ones in use.

The following is a list of frequencies of the CTCSS codes. Different brands of radios may use a different number code for the frequencies. For operation with other brands of radios the selected CTCSS frequency must match.

01=67.0 Hz	11=97.4 Hz	21=136.5 Hz	31=192.8 Hz
02=71.9 Hz	12=100.0 Hz	22=141.3 Hz	32=203.5 Hz
03=74.4 Hz	13=103.5 Hz	23=146.2 Hz	33=210.7 Hz
04=77.0 Hz	14=107.2 Hz	24=151.4 Hz	34=218.1 Hz
05=79.7 Hz	15=110.9 Hz	25=156.7 Hz	35=225.7 Hz
06=82.5 Hz	16=114.8 Hz	26=162.2 Hz	36=233.6 Hz
07=85.4 Hz	17=118.8 Hz	27=167.9 Hz	37=241.8 Hz
08=88.5 Hz	18=123.0 Hz	28=173.8 Hz	38=250.3 Hz
09=91.5 Hz	19=127.3 Hz	29=179.9 Hz	<b>oF</b> =OFF
10=94.8 Hz	20=131.8 Hz	30=186.2 Hz	

### RESETTING THE RADIO

If the radio stops responding to button presses or otherwise does not function properly in some cases the radio can be reset to restore normal operation.

To reset the radio: With the radio off, press and hold the "**F**" button and turn the radio on. Release the "**F**" button when the radio powers up. (see turning the radio on)

## TROUBLESHOOTING

## PROBLEM

## SOLUTION

<b>No Power</b>	1. Check battery installation and/or replace alkaline batteries or recharge rechargeable batteries. <u>DO NOT</u> attempt to charge any type of Alkaline battery in this radio!
<b>Cannot Receive Messages</b>	1. Make sure the volume is set high enough. 2. Change your location, you may be out of range.
<b>Range is short</b>	1. Operating the radio in a vehicle or metal building will decrease the range. If possible operate outside of vehicles or buildings. 2. Carrying the radio so that the antenna is very near the body will decrease the range. Hold the radio in the open for the best range. 3. Battery condition can affect range. Replace alkaline batteries or recharge rechargeable batteries. <u>DO NOT</u> attempt to charge any type of Alkaline battery in this radio!
<b>Radio squeals when receiving messages</b>	1. Check battery condition. Usually lowering the volume stops the squealing. This indicates weak batteries. Replace alkaline batteries or recharge rechargeable batteries. <u>DO NOT</u> attempt to charge any type of Alkaline battery in this radio !
<b>Messages not transmitted.</b>	1. If <b>PTT</b> button is not responding, check to see if <b>VOX</b> is active. 2. If <b>VOX</b> is in use, check for correct <b>VOX</b> level setting.
<b>Interference/Static</b>	1. Change your location. The interference may be caused by nearby electronic or electrical equipment.
<b>Cannot change channels</b>	1. Make sure keyboard is not locked. 2. Make sure the radio is not transmitting.
<b>Battery icon flashes</b>	Replace alkaline batteries or recharge rechargeable batteries. <u>DO NOT</u> attempt to charge any type of Alkaline battery in this radio!
<b>Display is dim</b>	Reposition or replace alkaline batteries or rechargeable batteries. <u>DO NOT</u> attempt to charge any type of Alkaline battery in this radio!

**CARE OF RECHARGEABLE NI-CAD AND NI-MH BATTERIES**

**PLEASE ALWAYS DISPOSE OF BATTERIES PROPERLY**

Always follow the battery manufacturers recommendations for charging and disposing of Ni-Cad and Ni-MH batteries.

General information regarding Ni-Cad/Ni-MH batteries;

1. Occasionally allow the batteries to fully discharge before recharging. Full discharge will be indicated by the low battery indicator coming on during receive operation.
2. Always allow the battery to fully charge before using. This requires 10 hours with the approved charger. (Ni-MH batteries require 16 hours for full charge.)
3. The above will prevent the batteries from developing "memory" which effectively reduces their capacity.
4. It is better to store Ni-Cad batteries that are discharged rather than charged.  
Ni-MH batteries are best stored charged.

## TECHNICAL SPECIFICATIONS\*

### GENERAL

Frequency range.....**462/467 MHz**  
 Channels.....**14**  
 Modulation type..... **FM**  
 Antenna impedance .....**50 Ohm**  
 Loudspeaker.....**8 Ohm 0.5W**  
 Microphone.....**electret type**  
 Power supply.....**3 AAA Ni-cads or Alkaline (3.6/4.5VDC)**

### RECEIVER

Sensitivity at 12dB Sinad.....**0.25µV**  
 Selectivity.....**50 dB**  
 Squelch range.....**automatic**  
 Audio output power.....**0.25W @ 8 Ohm (10% distortion)**  
 Distortion at 1000 mV.....**7%**  
 Audio frequency response.....**400-2400 Hz**

### TRANSMITTER

RF Output Power.....**nominal 500 mW @ 4.5VDC**  
 Frequency Tolerance.....**0.00025%**  
 Harmonic Suppression.....**more than 50 dB**  
 Modulation.....**FM +/- 2.5 kHz**

**\*Specifications are nominal and subject to change**

## CHANNEL FREQUENCIES

01=462.5625	05=462.6625	09=467.5875	13=467.6875
02=462.5875	06=462.6875	10=467.6125	14=467.7125
03=462.6125	07=462.7125	11=467.6375	
04=462.6375	08=467.5625	12=467.6625	

### SERVICE:

If you have a problem, which you believe requires service, please call first and speak with a service technician. Many problems can be remedied over the phone without returning the unit for service.

If it ever becomes necessary to return your unit for service:

- ◆ Pack the unit in its original box and packing. Improper packing may result in damage during shipment.
- ◆ Include a full description of any problems.
- ◆ Include a daytime telephone number.
- ◆ Include a money order for \$7.50 to cover shipping and handling (this may not be required in some states). You do not need to return accessory items (charger, batteries, wrist strap, owners guide) unless they maybe directly related to the problem.
- ◆ Include a photocopy of the bill of sale or other proof of purchase showing the date of sale. This information must be included before warranty service can be considered.
- ◆ A flat rate of \$35.00 will apply to repairs not covered by the 1 year warranty. These items include but not limited to Abuse, Internally modified circuits, damage caused by water , battery leakage or liquid spilled into the radio.
- ◆ Payment is accepted by Cashiers Check, Money Order, Master Card or Visa only. Personal checks will not be accepted.

Items not covered by the warranty include abuse, water damage, battery leak damage, broken antennas, broken battery latch

### LIMITED WARRANTY.

Midland Consumer Radio will repair or replace, at its option without charge, any Midland (FRS) transceiver which fails due to a defect in material or workmanship within one year following the initial consumer purchase.

This warranty does not include any carrying cases, earphones, or telescoping antennas which may be a part of or included with the warranted product, or the cost of labor for removal or re-installation of the product in a vehicle or other mounting.

Performance of any obligation under this warranty may be obtained by returning the warranted product, freight prepaid, along with proof of purchase date, to Midland Consumer Radio, Warranty Service Department 1120 Clay Street North Kansas City, MO 64116 , or to any " Midland Authorized Warranty Service Station," or to the place of purchase ( if a participating dealer).

Warranty information and the location of the nearest "Midland Authorized Warranty Service Station," may be obtained by writing Midland Consumer Radio, Warranty Service Department.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**Note:** The above warranty applies only to merchandise purchased in the United States of America or any of the territories or possessions or from U.S. military exchange. For warranty coverage on merchandise purchased elsewhere, consult the supplemental warranty information included with this product or ask your dealer.

### MIDLAND RADIO CORPORATION

1120 Clay Street  
North Kansas City, MO 64116  
Phone 816-241-8500. Fax 816-241-5713  
E-mail: [midlndcb@midlandradio.com](mailto:midlndcb@midlandradio.com)



or visit us at [www.midlandradio.com](http://www.midlandradio.com)